


# PVC Insulated

<b>Geleiders</b>	<b>Extension grade, stranded</b>
<b>Conductor size*</b>	<b>0.5mm<sup>2</sup>(16x0.2mm) or 1.5mm<sup>2</sup>(48x0.2mm)</b>
<b>Isolatiemateriaal</b>	Elke draad hoge kwaliteit geëxtrudeerd PVC
<b>Vorm</b>	Getwist paar
<b>Vochtbestendigheid</b>	Goed
<b>Temperatuurgrenzen</b>	-30/ +95 °C
<b>Calibration*</b>	K,T,J,E,R,S or N
<b>Nauwkeurigheid</b>	IEC-584/ ANSI MC 96.1
<b>Colour code*</b>	IEC-584/ ANSI MC 96.1

## Afmetingen

Conductor size	0.5	1.5	mm <sup>2</sup>
Outside diameter each wire	1.2x2.0	1.5x2.5	mm

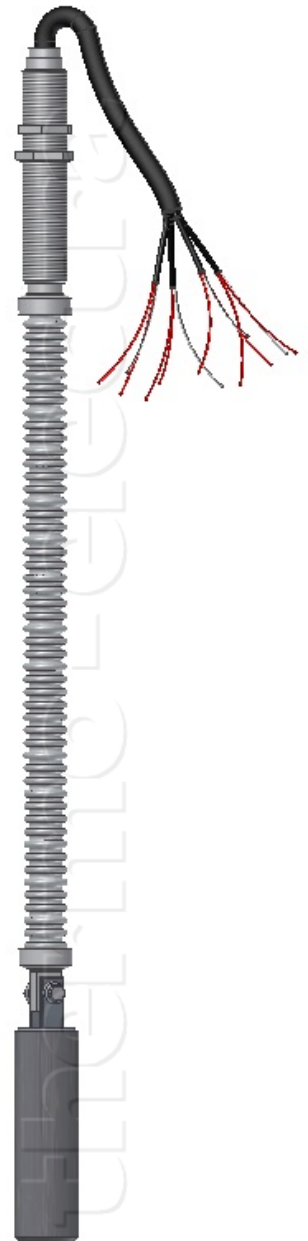

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

E 30

Revisie: 1.0