

TE1060D Dubbele thermokoppel stekker

Toepassingen

Connector	Voor het aansluiten van 2 thermokoppels op 1 stekker
Contacten	Zorgen voor een goed contact, zelfs in veeleisende toepassingen
Materialen	Glas gevulde thermoplastische stekker met origineel thermokoppel materiaal

Temperatuurbereik

Temperatuurgrens	Maximaal 200°C
------------------	----------------

Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Centrale dichtingsschroef voor snelle bedrading
Gegoten isolatieschotten	Om kortsluiting te voorkomen


Draad afmeting

Accepteert draden	van 0,2 mm. tot 2,0 mm.
Kabel diameter	Maximum 8,0 mm

Accessoires

Optionele accessoires	Zie aparte datasheet
-----------------------	----------------------

Kleurcode

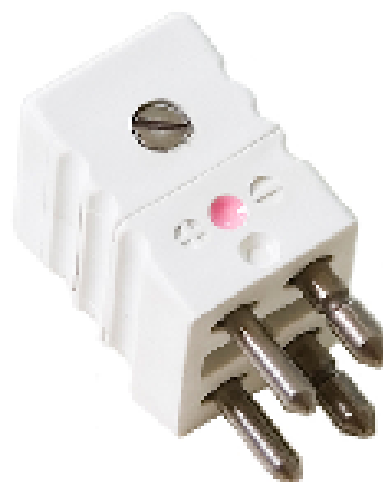


Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

** For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors*

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model



Type J, T, K, N, E, S, R, Cu of C

IEC of ANSI

H9-1 Rev.0 7/07