

TE1011 3-polige thermokoppel contrastekker

Toepassing

Connector	Thermocouple and RTD circuits Third contact for ground, shield or for three wire RTD
Materialen	Glasgevulde thermoplastische stekker met origineel thermokoppel materiaal

Temperatuurbereik

Temperatuurgrens	Maximaal 200°C
------------------	----------------

Constructie

Insert	Terugverende thermokoppel gelegeerd
Contacten	Zorgt voor een goed contact, zelfs in veeleisende toepassingen
Gegoten isolatieschotten	Voorkomen kortsluiting


Draad afmeting

Accepteert draden	Van 0,2 mm. tot 2,0 mm.
-------------------	-------------------------

Accessoires

Optionele accessoires	Zie aparte datasheet
-----------------------	----------------------

Kleurcode

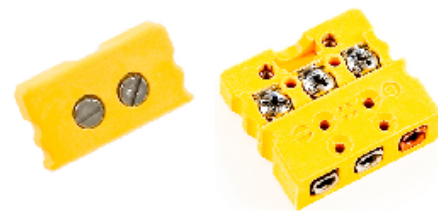


Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

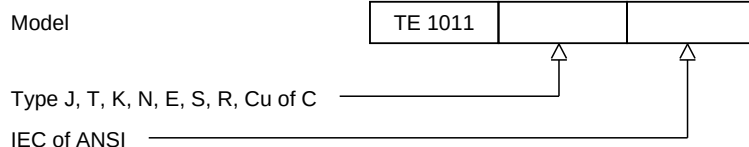

H9-1 Rev.0 7/07