

TE1537 Mini thermokoppeljack met aluminium frame

Toepassing

Meervoudig female panel contacten	Thermokoppel en Pt100 circuits
Materialen	Verende thermokoppel contacten
Front	Glas versterkt kunststof behuizing met originele thermokoppel contacten
	Geanodiseerd aluminium voor volledige corrosie bescherming

Temperatuurbereik

Temperatuurgrens	Maximaal 200°C
------------------	----------------


Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Roestvrijstalen beugel met 2 schroeven
Gegoten isolatieschotten	Voorkomen kortsluiting
Codering	Krasbestendige nummering

Draad afmeting

Accepteert draden	Van 0,2 mm tot 2,0 mm
-------------------	-----------------------

Kleurcode

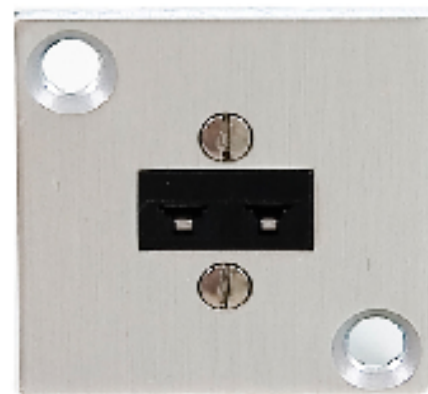


Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

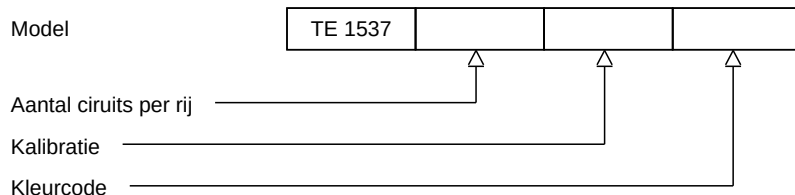

H9-2 Rev. 0 07/07