


TE1930 Mini strippaneel 3-polig

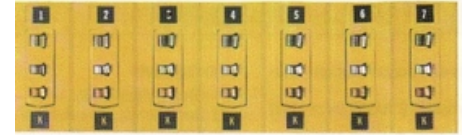


Derde contact	Derde contact is koper t.b.v. grounding/aarde
Toepassing	
Contacten	Verende thermokoppel contacten
Behuizing materiaal	Glas versterkt kunststof behuizing
Aantal aansluitingen	
Aansluitingen	Beschikbaar 2 tot 8 aansluitingen
Temperatuurbereik	
Temperatuurgrens	Maximaal 205°C (260°C piek)
Constructie	
Behuizing	Glas versterkt kunststof behuizing
Ontwerp	Schroefmontage aan de voorkant
Gegoten isolatieschotten	Voorkomen kortsluiting
Codering	Krasbestendige nummering
Afmetingen	
Hoogte	38,1mm
Breedte	17,5 mm x aantal aansluiting
Kleurcode	

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

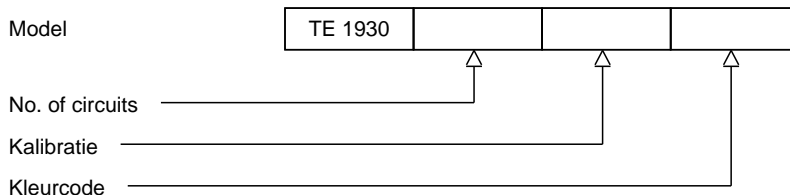

H9-2 Rev. 0 07/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

