

TE1830 Standaard 3 pin chassisdeel

Toepassing

Meervoudig female paneel	Thermokoppel en Pt100 circuits Toepassing paneel inzetstuk voor thermokoppels en RTD circuits met aluminiumframe
Aantal schakelingen	Leverbaar van 1 t/m 6 circuits op specificatie
Contacten	Veerbelaste thermokoppel contacten
Materialen	Glasgevuld thermoplastisch met origineel thermokoppel materiaal contacts



Temperatuurbereik

Temperatuurgrens	Maximaal 200 °C
-------------------------	-----------------

Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Roestvrijstalen beugel met 2 schroeven
Gegoten isolatieschotten	Voorkomen kortsluiting

Draad afmeting

Accepteert draden	Van 0,2 mm tot 2,0 mm
--------------------------	-----------------------


Kleurcode

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt. 6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

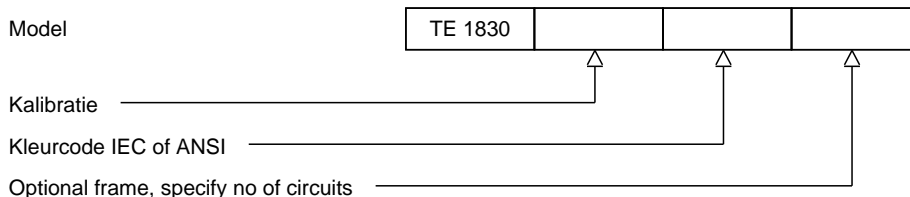

H9-2 Rev. 0 07/07