

E30 Getwiste PVC thermokoppel verlengkabel -30°C tot 85°C

Specificaties

Isolatiemateriaal	Hoge kwaliteit geëxtrudeerd PVC
Temperatuurgrenzen	-30/+85°C
Vochtbestendigheid	Goed

Geleiders

Geleider uitvoering	Soepel, paar getwist
Aderdikte	0.5 mm ² (16x0.2mm) 1.5 mm ² , (48x0.2mm)
Buitendiameter	0.5 mm ² , 1.6 mm 1.5 mm ² , 2.8 mm

Kalibratie

Thermokoppel type	K, T, J, E, U, L, N, B, R of S
Foutgrenzen	Volgens IEC 584 en ANSI MC 96.1

Kleurcode

Volgens IEC 584 of ANSI MC 96.1

Toepassingen

Kast en instrumentatie circuit bedrading
Industriële en algemene toepassingen

Afmetingen

Wire size	0.5	1.5	mm ²
Uitwendige afmetingen $\hat{\pm}$	2x1.6	2x2.8	mm


International Thermocouple Colour Codes						
Thermocouple Extension Type	ANSI	BS	DIN	NFC	JIS	IEC
JX + Iron - Constantan						
KX + Chromel - Alumel						
TX + Copper - Constantan						
EX + Chromel - Constantan						
NX + Nicrosil - Nisil						
SX + Copper RX - Alloy 11						
BX + Copper-S - Copper-E						

 **thermo-electra**
temperature sensor solutions

Weteringweg 10, 2641 KM Pijnacker, The Netherlands
Phone: +31 15 362 12 00, E-mail: mail@thermo.nl
www.thermo-electra.com

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

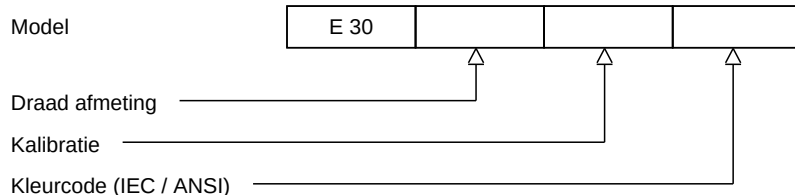

H8-1 Rev. 07/07

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

