

# E70 Afgeschermdde thermokoppel verlengkabel -30°C tot 85°C

## Specificaties

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| Isolatiemateriaal  | Elke draad hoge kwaliteit geëxtrudeerd PVC          |
| Elektrische scherm | Twee lagen van aluminium mylar tape met aarde draad |
| Buitenmantel       | Hoge kwaliteit geëxtrudeerd PVC                     |
| Vorm               | Rond                                                |
| Vochtbestendigheid | Goed                                                |
| Vlambestendigheid  | Goed                                                |
| Temperatuurgrenzen | -30/+85°C                                           |

## Geleiders

|                     |                                                      |
|---------------------|------------------------------------------------------|
| Geleider uitvoering | A) Massief of B) Litze                               |
| Aderdikte           | Massief 1.3 mm Litze 1.5 mm <sup>2</sup> (48x0.2 mm) |
| Constructie         | Getwiste paar                                        |

## Kalibratie

|                   |                                     |
|-------------------|-------------------------------------|
| Thermokoppel type | K, T, J, E, U, L, N, B, R of S      |
| Foutgrenzen       | Voldoet aan IEC 584 en ANSI MC 96.1 |

## Kleurcode

Volgens thermokoppel kalibratie

## Afmetingen

|                  |     |     |       |
|------------------|-----|-----|-------|
| Outside diameter | 8.5 | 10  | mm    |
| Weight           | 105 | 120 | kg/km |


| International Thermocouple Colour Codes |      |    |     |     |     |     |
|-----------------------------------------|------|----|-----|-----|-----|-----|
| Thermocouple Extension Type             | ANSI | BS | DIN | NFC | JIS | IEC |
| JX + Iron - Constantan ®                |      |    |     |     |     |     |
| KX + Chromel ® - Alumel ®               |      |    |     |     |     |     |
| TX + Copper - Constantan ®              |      |    |     |     |     |     |
| EX + Chromel ® - Constantan ®           |      |    |     |     |     |     |
| NX + Nicrosil ® - Nisil ®               |      |    |     |     |     |     |
| SX + Copper - Alloy 11                  |      |    |     |     |     |     |
| RX - Alloy 11                           |      |    |     |     |     |     |
| BX + Copper-S - Copper-E                |      |    |     |     |     |     |

 **thermo-electra**  
temperature sensor solutions

Weteringweg 10, 2641 KM Pijnacker, The Netherlands  
Phone: +31 15 362 12 00, E-mail: mail@thermo.nl  
www.thermo-electra.com

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

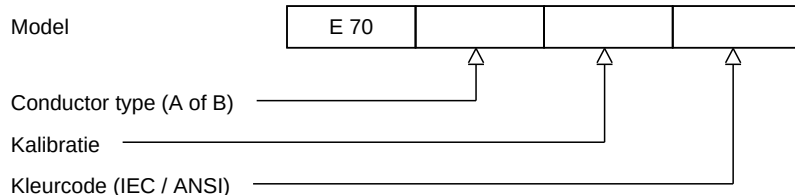

H8-1 Rev. 07/07