

# C50 Instrument Cable, With Electrical Screen and Armour

## Isolatiemateriaal


	Each wire high quality extruded
<b>Specificeren</b>	P : for PVCPE : for Polyethylene
<b>Binnenmantel</b>	High quality extruded PVC or PE
<b>Elektrische scherm</b>	Two layers of aluminium mylar tape with tinned copper earth wire 7 x 0.25 mm
<b>Armering</b>	Served steel wires, 0.9 mm minimum, with counter steel band
<b>Buitenmantel</b>	Hoge kwaliteit geëxtrudeerd PVC
<b>Vorm</b>	Rond
<b>Vochtbestendigheid</b>	Goed
<b>Vlambestendigheid</b>	Goed
<b>Temperatuurgrenzen</b>	PVC : -30 / +105 ° CPE : -30 / +70 ° C

## Geleiders

	Stranded copper
<b>Aderdikte</b>	1.3 mm <sup>2</sup> , 7 x 0.5 mm ( 16 Awg )
<b>Number of pairs or triad</b>	1
<b>Constructie</b>	Twisted, ± 20 times per meter
<b>Identification</b>	P : pair ; Black and white T : triad ; Black, white and red
<b>Jacket colour</b>	Black or blue
<b>Specificeren</b>	

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

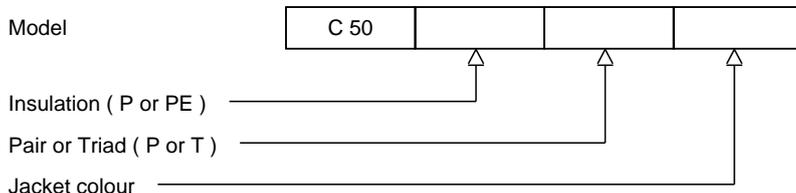

H8-1 Rev. 07/07