

# C71 Multicore Instrument Cable, With Electrical Screen and Armour

## Isolatiemateriaal


	Each wire inner and overall jacket high quality extruded
<b>Specificeren</b>	P : for PVCPE : for Polyethylene
<b>Indicidual shield</b>	Aluminium mylar tape, 100% coverage Earthwire 0.6 mm. tinned copper
<b>Totaal afscherming</b>	Aluminium mylar tape, 100% coverage Earthwire tinned copper 0.8 mm. solid ( C ) or stranded 7 x 0.31 mm. / 0.5 mm <sup>2</sup> ( D )
<b>Armering</b>	Served steel wires, 0.9 mm minimum, with counter steel band
<b>Buitenmantel</b>	Hoge kwaliteit geëxtrudeerd PVC
<b>Vorm</b>	Rond
<b>Vochtbestendigheid</b>	Goed
<b>Vlambestendigheid</b>	Goed
<b>Temperatuurgrenzen</b>	PVC : -30 / +105 ° CPE : -30 / +70 ° C

## Geleiders

	Stranded copper
<b>Aderdikte</b>	0.51 mm <sup>2</sup> , 7 x 0.3 mm ( 20 Awg )
<b>Aantal paren</b>	2, 4, 6, 10, 12, 16, 20, 24, 36 or 48
<b>Number of triads</b>	2, 3, 4, 6, 8, 10, 12, 20 or 24
<b>Constructie</b>	Twisted, ± 20 times per meter
<b>Identification</b>	Pair or Triad ( P or T ), numbered Triad : Black, white and red, numbered
<b>Jacket colour</b>	Black or Blue
<b>Specificeren</b>	

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

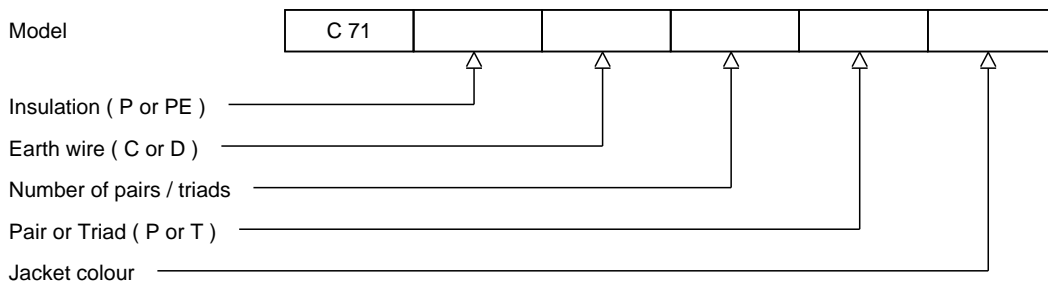

H8-1 Rev. 07/07