

LEX35B Explosieveilige EEx d Thermokoppel voor zone 1 en 2

Construction

According EN 50014 and AND 50018

Ex execution

II 2G EEx d IIC T6

Certificate

KEMA 02ATEX1236 X

Suitable for zone

1 and 2

Ingress protection

IP67 / IEC529

Ambient temp. range

-20°C..+70°C

Sheath

Construction

Mineral insulated (MgO)

Material

SS316

Diameter "D"

Customer to specify

length "L"

Customer to specify

Sealpot

Dimensions

Approx. 70 x 14mm

Cable screen

Sensortube connected to cable screen

Element

Calibration

K, T, J, E, N, R, S, B, U or L

For duplex

KK, TT, JJ, EE, NN, RR, SS, BB, UU or LL

Accuracy

IEC 584


Lead wire

Insulation

PVC, 105 °C

Wire Length "K"

Customer to specify

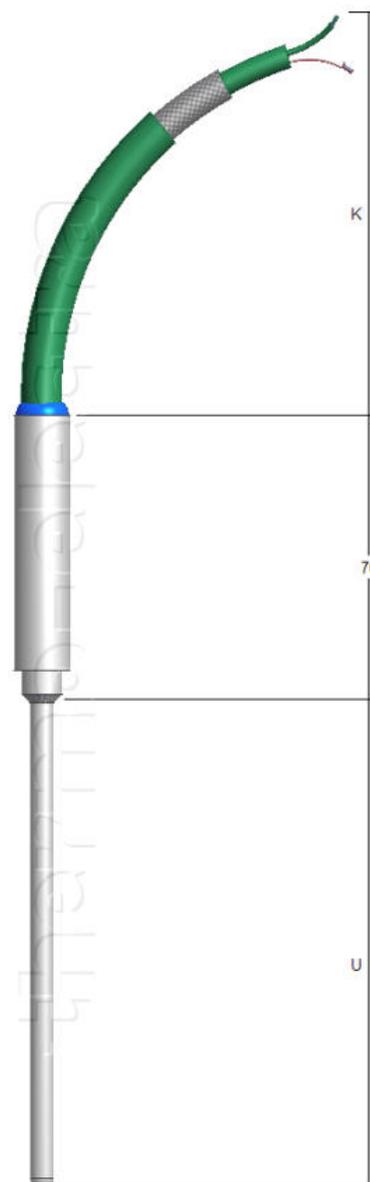

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

LEX35B

H3-1 Rev.0 7/07