

TE1261 Mini plug 3-polig

Toepassing

Connector	Thermocouple and RTD circuits Third pin for ground, shield or for three wire RTD
Ontwerp	Geschikt voor kleine draden en minimale aderisolatie
Materialen	Glasgevuld kunststof behuizing met origineel thermokoppel materiaal pinnen

Temperatuurbereik

Temperatuurgrens	Maximaal 200°C
-------------------------	----------------

Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Robuust op lichaam ontwerp


Draad afmeting

Accepteert draden	Vanaf 0,002 mm tot 0,6 mm
Kabelmantel diameter	Maximaal 4,5 mm.

Accessoires

Optionele accessoires	Zie aparte datasheet
------------------------------	----------------------

Kleurcode

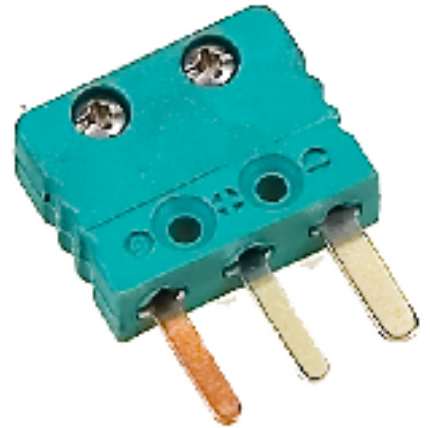

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

TE 1261

H9-1 Rev.0 7/07



thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

