

TE1211 Mini jack 3-polig

Toepassing

Connector	Thermokoppel en Pt100 circuits
Ontwerp	Geschikt voor kleine draden en minmal aderisolatie
Materialen	Glas gevuld thermoplastische lichaam met originele thermokoppel inhoudelijke contacten

Temperatuurbereik

Temperatuurgrens	Maximaal 200Â°C
-------------------------	-----------------

Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Robuust
Gegoten isolatieschotten	Voorkomen kortsluiting


Draad afmeting

Accepteert draden	Vanaf 0002 mm. tot 0,6 mm
Kabelmantel diameter	Maximaal 4,5 mm.

Accessoires

Optionele accessoires	Zie aparte datasheet
------------------------------	----------------------

Kleurcode

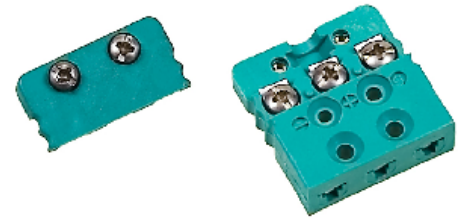

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

TE 1211

H9-1 Rev.0 7/07