

TE1210ML Mini TC contrastekker met mechanische vergrendeling

Toepassing

Connector	Thermokoppel en Pt100 circuits
Ontwerp	Geschikt voor kleine draden en minimale aderisolatie
Materialen	Glas gevuld thermoplastisch body met originele thermokoppel materiaal contacten

Temperatuurbereik

Temperatuur grens	Maximaal 200°C
--------------------------	----------------

Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Robuust ontwerp
Gegoten isolatieschotten	Voorkomen kortsluiting


Draad afmeting

Accepteert draden	Vanaf 0.002mm tot 0.6mm
Kabeldiameter	Maximaal 4.5mm

Accessoires

Optionele accessoires	Zie aparte datasheet
------------------------------	----------------------

Kleurcode

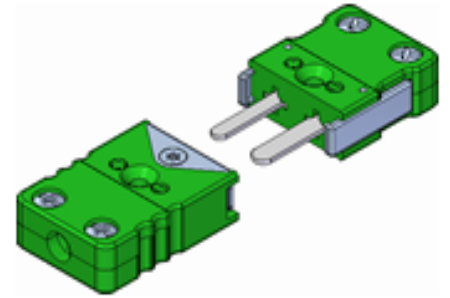


Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

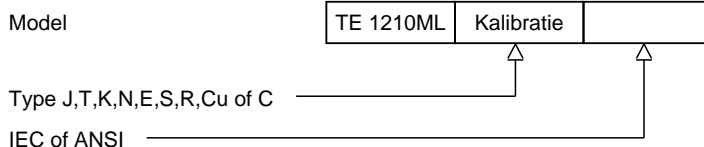

thermo-electra
temperature sensor solutions

Thermo Electra B.V.
Weteringweg 10
2641KM Pijnacker
The Netherlands

Phone +31 (0)15 - 3621200
Fax +31 (0)15 - 3694082
Email sales@thermo.nl
http://www.thermo-electra.com

