


TE1061 3-polige thermokoppel stekker

Connector	
Toepassing	
Materialen	Glasgevuld kunststof body met origineel thermokoppel materiaal pinnen
Temperatuurbereik	
Temperatuurgrens	Maximaal 200°C
Constructie	
Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Centrale dichtingsschroef voor snelle bedrading
Gegoten isolatieschotten	Voorkomen kortsluiting
Draad afmeting	
Accepteert draden	van 0,2 mm. tot 2,0 mm.
Kabelmantel diameter	Maximum 8,0 mm.
Accessoires	
Optionele accessoires	Zie aparte datasheet
Kleurcode	

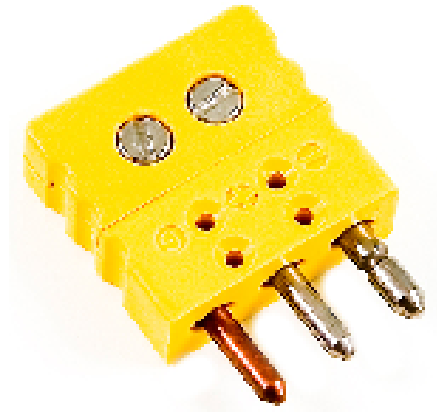

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model

TE 1061

H9-1 Rev.0 7/07